

Package Contents: Handle Assembly
Instructions

Tools Required: T30 Torx (Star) Bit/Driver
10mm Wrench

Step 1: - Code the lock to the truck key. **CAUTION: the lock can only be coded once.**


Only insert key intended for everyday use.

1. Remove protective label from lock face.
2. **FULLY INSERT THE KEY** intended for everyday use.
3. **Rotate key clockwise** until it stops **while maintaining full key insertion**. Lock is now fully coded and ready for everyday use.
4. Test lock for proper operation. Turn the key clockwise and back to center to lock. Turn the key counter clock wise and back to center to unlock.

Step 2: Remove T30 torx (star) screws from inside of tailgate that holds access panel in place. Remove access panel by lifting the bottom and sliding it out of top plastic trim piece. You may have to lift trim piece up away from tailgate in the middle to allow access panel to slide down.



Step 3: Remove latch rods from plastic clips (1). Do this by turning clips off of rod and lift out of clip. If truck has a back up camera, remove the two 10mm bolts (2) that hold the camera and holder onto OEM handle. Remove the two 10mm bolts (3) that hold handle into the tailgate. Hold handle in place to prevent from falling out. -Push the two plastic tabs of the gasket in towards the handle past the sheet metal and remove the handle from the tailgate.

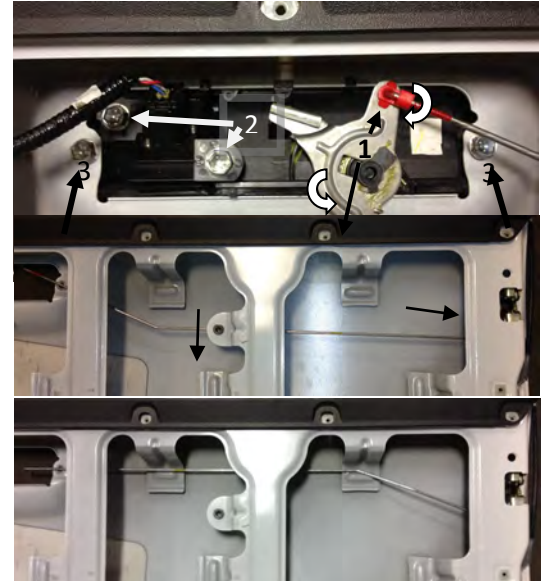

Step 4: * THE LEFT DRIVER'S SIDE LATCH ROD NEEDS TO BE FLIPPED END FOR END***** in order to allow for the lock assembly. (The Handle Assembly may work without flipping latch rod, but it may lead to premature failure.) Do this by popping the latch rod out of the black clip, which is located at the center of the rod. Push the rod towards the bottom of the tailgate to pop it out of clip. Next remove the rod from the driver side latch. This latch clip is towards the driver side of the tailgate under the sheet metal inside the tailgate. This clip is the same type as the ones on the handle. Turn the clip off of the rod and lift the rod out of the clip. Flip the rod **end for end** so the bent part of the rod is closer to the driver side latch. The rod will run along the top part of the tailgate as shown in the picture.

Step 5: Remove plastic gasket by pulling it off the OEM handle and reinstall it onto the Pop and Lock handle ensuring it is seated on the 3 plastic posts.

-Install the Pop and Lock handle into the tailgate. Start by verifying that the black plastic toggle on the back of the pop and lock is pushed to the unlock position and the metal rod clip plate is rotated fully clockwise (as shown in the bottom picture). *You may have to hold the plate rotated as you install the handle.* Put the bottom of the handle into the tailgate first then rock the top of the handle into the tailgate. The tabs on the gasket should snap past the sheet metal. (Hold the handle in place to prevent the handle from falling out).

-Install the two 10mm bolts that fasten handle to the tailgate.

-If truck has backup camera, remove camera cover from the PL5400 by pushing in on the 2 snap tabs and popping the cover off of handle. Position camera on handle. If metal rod from the handle interferes, slide rod back out of the way. Install the two 10mm bolts to fasten camera.

-Install rods into the clips and turn clips till they snap onto the rods.

(Do not install the access panel back onto the truck yet)



Step 6: If the lock operates properly, reinstall the access panel.


Technical Support:


Call 920-283-1933

technicalsupport@popandlock.net



LIMITED WARRANTY TERMS & CONDITIONS

 Toll Free: 1 (844) 996-5625

 1271 Contract Drive, Green Bay WI, 54304

 customerservice@popandlock.net

INSTALLATION

Pop & Lock™, LLC (and Pop & Lock™ Corporation) is not responsible for installing the Pop & Lock™ or for the harm suffered by any person as a result of installing it.

WARRANTIES

- a. Customer acknowledges that it is unreasonable to believe that any device what so ever will prevent a theft in the case of every attempt and that the most that can be expected from a so-called anti-theft or security device is that it will deter many thieves.
- b. POP & LOCK™ LLC. (and Pop & Lock™ Corporation) MAKES, AND CUSTOMER RECEIVES, NO WARRANTY, EXPRESSED OR IMPLIED, EXCEPT THE WARRANTIES OF TITLE TO THE POP & LOCK™ AND THEIR MERCHANTABILITY, PARTICULARLY NO WARRANTY OF FITNESS FOR A PARTICULAR USE OR PURPOSE OR AGAINST INFRINGEMENT.
- c. As Customer's only remedy, Pop & Lock™, LLC (and Pop & Lock™ Corporation) will repair or replace, at its option and without charge, any lock that is defective in material or workmanship when received by Customer and is returned to Pop & Lock™ LLC (and Pop & Lock™ Corporation), FOB Pop & Lock™ Corporation's offices, within one year after its receipt by the Customer. Pop & Lock LLC will ship all replacement, or repaired, locks to Customer, FOB Pop & Lock™'s shipping point.
- d. Factory support is only available for Pop & Lock™ products purchased as new through an Authorized Pop & Lock™ dealer.
Please Note: Pop & Lock™ products purchased on Buy/Sell/Trade websites (i.e. Craigslist) will not be covered under factory warranty. Products purchased from an authorized dealer as "new" on Amazon will follow normal warranty policy, process and procedures. Products purchased from Ebay as "new" must follow their website warranty policy, process and procedures. Pop & Lock™ products sold as "used", "refurbished", "open box" etc. cannot be verified by Pop & Lock™, LLC (and Pop & Lock™ Corporation) and Pop & Lock, LLC (and Pop & Lock™ Corporation) is unable to warranty such purchases. Pop & Lock, LLC advises using extreme caution when buying through auction sites as you will be doing so at your own risk.

NO LIABILITY

Pop & Lock™ Corporation is not liable for any loss or damage claimed by Customer or any third person to have been suffered or incurred as a result, or related to, the locks purchased under this Agreement, regardless of the circumstances or form of action, except any bodily injury or death for which Pop & Lock™ is liable under products-liability law. Without limiting the generality of the foregoing, in no event will Pop & Lock™ LLC be liable to Customer for any indirect, special, or consequential damages, regardless of the circumstances or the cause of action, particularly not for the value of a vehicle, or any other money damages in the event that a tailgate is stolen either notwithstanding the use of a Pop & Lock™ or when it has been returned for repair or replacement.

END OF TERMS AND CONDITIONS

Pop and Lock's limited warranty expires one (1) year after date of purchase.

Proof of purchase is required for warranty claims. Please submit a scanned copy or electronic image/photo of your receipt through one of the following methods:

E-mail: technicalsupport@popandlock.net

Fax: 855-491-5911

Please be sure to include:

- Name, preferred shipping address and phone number
 - Make and model year of truck
 - Model/Part Number of the lock
- Brief description of the problem being experienced
 - Photos/Video showing issue (email only)