

CAT-RAP™

CATALYTIC CONVERTER SECURITY

Parts List

- A. Stainless Steel Security Plate with plastic bolt holding adapter plate
 - a. Eleven (11) pre-installed hex head screws
 - b. Four (4) security screws
- B. Two (2) 17.5 feet lengths of Stainless-Steel Cable
- C. Installation Bit
- D. Stainless Steel Cover

B.



C.



D.



Recommended Tools


- Safety Glasses
- Work Gloves
- Impact Drill or Wrench with 7/16" socket
- Driver bit screwdriver

A.



The CAT-RAP™'s unique design allows it to accommodate a wide variety of vehicle types and Catalytic Converter (CAT) positions (*i.e., vertical vs. horizontal*). There are many ways to install your CAT-RAP. The intent of this theft deterrent is to confuse, frustrate and create enough time or hassle that a thief will ultimately look for an easier target. The more wraps made around the CAT, exhaust pipe and vehicle frame, the more secure your CAT will be.

Figure 1

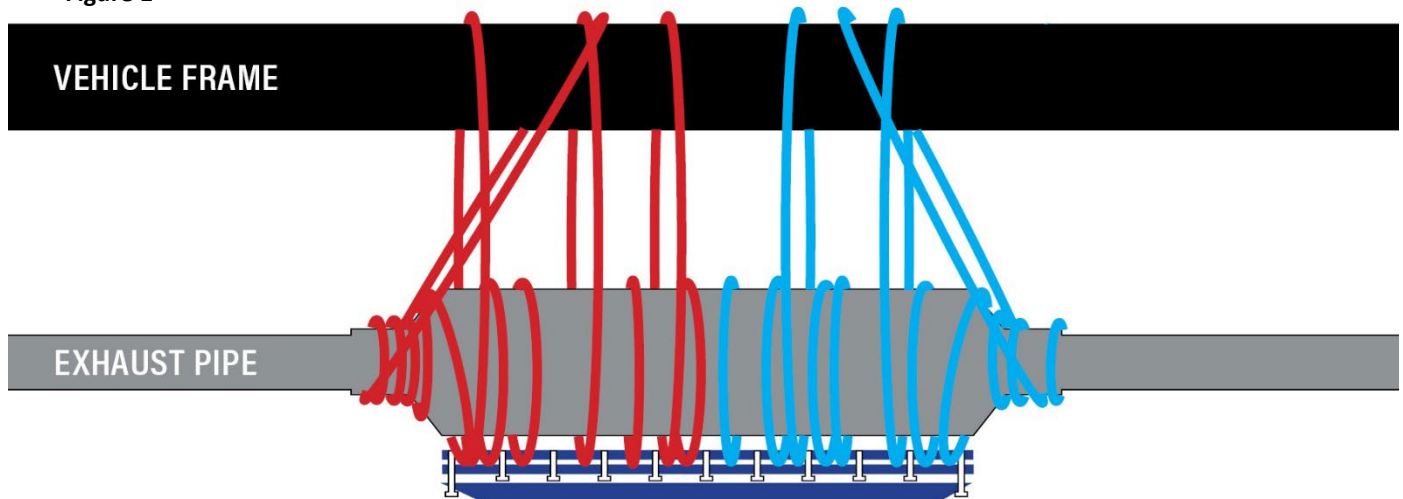

Note: Start in the middle and wrap outward. A minimum of 3 to 4 wraps is recommended around the center and each end of the exhaust pipe.

WARNING #1: Due to extreme temperatures, do not attempt installation or modification of the CAT-RAP within five (5) hours of vehicle operation.

PATENT PENDING

POP!LOCK
LOCK YOUR WORLD

CABLE WRAPPING STRATEGY: The CAT-RAP's security plate system is designed to be universal and adapt to most vehicles. The CAT-RAP allows for up to 20 individual security loops as the cable can be inserted through each plate channel up to two times. As the cable passes through the plates, it creates secure, individual loops around the CAT and vehicle frame. Once tightened, if one loop is tampered with, the remaining loops will not be affected.

The best strategy is to utilize a sequence of tight wraps combined with looser wraps. The looser the cable, the harder to cut. However, be sure to adhere to the WARNING (#2) message below. It is recommended to start with 3-4 tight wraps first in the middle of the CAT and working your way to one side. Then use the remaining cable to create a series of looser wraps that surround the CAT and secure to the vehicle frame.

WARNING #2: All vehicles have unique undercarriage configurations. Make sure CAT-RAP and/or Cable is NOT touching, pinching, or compromising any electrical wires, brake lines, heat shields and/or critical drive train components. Also be sure the CAT-RAP or any cable is not hanging lower than any other part of the vehicle undercarriage before final tightening of the security plates.

INSTALLATION:

To ensure maximum security, it is recommended to have 3-to-4 wraps "tightly" around the middle of the CAT first to hold the device firmly in place during installation. This will also help eliminate any potential for vibration and/or road noise.

1. Read WARNING (#1) to ensure the vehicle is install ready. Then position Security Plates (*Part A*) under the Catalytic Converter (*CAT*) with the screw heads facing away from the CAT (*i.e. make sure they are accessible to tighten after routing the cable*).
2. While holding the security plates against the CAT, insert "un-ferruled" end of **CABLE ONE** (*Part B*) through the center channel (*see Figure 1*) of the security plates. Pull all the way through until the cable stops against the "ferruled" end.
3. Wrap the "un-ferruled" end tightly around the CAT and route through an adjacent channel in the security plates. Continue wrapping from the center working your way to one end of the CAT. (*Refer to Figure 1*)
4. Once you reach one end of the CAT, make a series of 2-to-4 tight wraps around the exhaust pipe where it is connected to the CAT. Then wrap the remaining cable a little looser (*allowing it to flex 1-2 inches each way*) alternating between the CAT and vehicle frame. Continue wrapping the cable around the CAT/Vehicle Frame (*Refer to Figure 1*) until there is only 2-to-3 inches of cable remaining after final insertion into the security plates.
5. **CABLE TWO:** Repeats steps 1-4 with the second cable but this time wrapping in the opposite direction. Just as before, start in the middle. **Please note: some vehicles may only require one length of cable to complete the install.**
6. Once the wrapping is complete, verify that you have at least 3-4 wraps total around the CAT; 3-4 wraps tightly around each side of the exhaust pipe where it connects to the CAT and 3-4 loose wraps around the frame. Be sure to adhere to the WARNING (#2) above before moving to step 7.
7. Remove the black plastic screw holder from the security plates. Start by lifting the screw holder at the center, flexing it up and out from under the security cover screws, once removed this can be discarded. **Please note: the plastic screw holder must be removed during this part of the install, DO NOT reinstall after tightening bolts.**
8. Tighten security plate bolts with impact drill or wrench using a 7/16" hex socket. DO NOT remove the security screws until security plate bolts are tightened. Once they are tightened, remove the (4) security cover screws and lock washers.
9. Attach cover plate (*Part C*) and secure with the four (4) security screws using the included driver security bit (*See Figure 2*).

The CAT-RAP™ is covered by a one (1) year warranty. Warranty does not extend to the cost of a replacement converter.

Figure 2 - Completed Install




**FOR ADDITIONAL ASSISTANCE, CHECK
OUT OUR INSTALLATION VIDEOS ON
WWW.POPANDLOCK.NET**



PATENT PENDING



LIMITED WARRANTY TERMS & CONDITIONS

 Toll Free: 1 (844) 996-5625

 1271 Contract Drive, Green Bay WI, 54304

 customerservice@popandlock.net

INSTALLATION

Pop & Lock™, LLC (and Pop & Lock™ Corporation) is not responsible for installing the Pop & Lock™ or for the harm suffered by any person as a result of installing it.

WARRANTIES

- a. Customer acknowledges that it is unreasonable to believe that any device what so ever will prevent a theft in the case of every attempt and that the most that can be expected from a so-called anti-theft or security device is that it will deter many thieves.
- b. POP & LOCK™ LLC. (and Pop & Lock™ Corporation) MAKES, AND CUSTOMER RECEIVES, NO WARRANTY, EXPRESSED OR IMPLIED, EXCEPT THE WARRANTIES OF TITLE TO THE POP & LOCK™ AND THEIR MERCHANTABILITY, PARTICULARLY NO WARRANTY OF FITNESS FOR A PARTICULAR USE OR PURPOSE OR AGAINST INFRINGEMENT.
- c. As Customer's only remedy, Pop & Lock™, LLC (and Pop & Lock™ Corporation) will repair or replace, at its option and without charge, any lock that is defective in material or workmanship when received by Customer and is returned to Pop & Lock™ LLC (and Pop & Lock™ Corporation), FOB Pop & Lock™ Corporation's offices, within one year after its receipt by the Customer. Pop & Lock LLC will ship all replacement, or repaired, locks to Customer, FOB Pop & Lock™'s shipping point.
- d. Factory support is only available for Pop & Lock™ products purchased as new through an Authorized Pop & Lock™ dealer.
Please Note: Pop & Lock™ products purchased on Buy/Sell/Trade websites (i.e. Craigslist) will not be covered under factory warranty. Products purchased from an authorized dealer as "new" on Amazon will follow normal warranty policy, process and procedures. Products purchased from Ebay as "new" must follow their website warranty policy, process and procedures. Pop & Lock™ products sold as "used", "refurbished", "open box" etc. cannot be verified by Pop & Lock™, LLC (and Pop & Lock™ Corporation) and Pop & Lock, LLC (and Pop & Lock™ Corporation) is unable to warranty such purchases. Pop & Lock, LLC advises using extreme caution when buying through auction sites as you will be doing so at your own risk.

NO LIABILITY

Pop & Lock™ Corporation is not liable for any loss or damage claimed by Customer or any third person to have been suffered or incurred as a result, or related to, the locks purchased under this Agreement, regardless of the circumstances or form of action, except any bodily injury or death for which Pop & Lock™ is liable under products-liability law. Without limiting the generality of the foregoing, in no event will Pop & Lock™ LLC be liable to Customer for any indirect, special, or consequential damages, regardless of the circumstances or the cause of action, particularly not for the value of a vehicle, or any other money damages in the event that a tailgate is stolen either notwithstanding the use of a Pop & Lock™ or when it has been returned for repair or replacement.

END OF TERMS AND CONDITIONS

Pop and Lock's limited warranty expires one (1) year after date of purchase.

Proof of purchase is required for warranty claims. Please submit a scanned copy or electronic image/photo of your receipt through one of the following methods:

E-mail: technicalsupport@popandlock.net

Fax: 855-491-5911

Please be sure to include:

- Name, preferred shipping address and phone number
 - Make and model year of truck
 - Model/Part Number of the lock
- Brief description of the problem being experienced
 - Photos/Video showing issue (email only)